

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number  
**WO 01/72030 A2**

- (51) International Patent Classification<sup>7</sup>: **H04N 1/32** (74) Agent: **SCHMITZ, Herman, J., R.**; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/EP01/02915**
- (22) International Filing Date: **15 March 2001 (15.03.2001)** (81) Designated States (national): **CN, JP, KR.**
- (25) Filing Language: **English**
- (26) Publication Language: **English** (84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- (30) Priority Data: **09/531,700** **20 March 2000 (20.03.2000)** **US** Published:  
— *without international search report and to be republished upon receipt of that report*
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: **KRISHNAMACHARI, Santhana**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



**WO 01/72030 A2**

(54) Title: **HIERARCHICAL AUTHENTICATION SYSTEM FOR IMAGES AND VIDEO**

(57) Abstract: A method and system for creating authentication signatures for digital images and video frames is provided. The method and system involves partitioning the image into multiple blocks, comparing characteristics from each block and generating data bits based on the comparison. Each block is then broken up into additional blocks and those blocks are compared to create additional signature bits which are combined with the signature sets from the first set of blocks. Each of these new smaller blocks can be further broken up and the procedure can be repeated to provide an authentication signature of desired length.

## Hierarchical authentication system for images and video

BACKGROUND OF THE INVENTION

The invention relates generally to authentication systems and methods for digital images and more particularly to improved methods, systems and signals for authenticating digital images.

5           The use of digital images and videos by both consumers and professionals is pervasive. Accordingly, it has become important to provide a system and method for authenticating digital images and videos to insure that they have not been tampered with. As an example, an authentication system could insure that someone has not replaced a person's face with that of another on a digital picture or series of video frames.

10           Authentication systems are known which extract a short signature from images (or video frames) which can be either inserted into the image signal or stored separately. The owner of the original content can use the signature to verify whether the content has been modified or users can confirm that they are receiving authentic digital images.

          Conventional content-based image authentication systems typically define an  
15   image into many blocks and extract characteristics about the blocks. For example, the image can be broken up into 16 x 16 blocks as in FIG. 1 or some other number of blocks, and some characteristic about the block, such as average luminance or chrominance values with respect to R, G, B or gray values. The characteristics of adjacent pairs of blocks are commonly compared and a signature is extracted based on this comparison. For example, if the average  
20   luminance value for the red component of a first block 110 of an image 100 is greater than or equal to that of a second block 120, a one bit will be generated. Otherwise, a zero bit will be generated. The process is repeated with successive blocks until a binary signature of ones and zeros is compiled.

          A disadvantage to this method is that because pairs of blocks each contribute a  
25   bit to the signature, it is possible to change the pair of blocks without affecting the signature by maintaining the difference or similarity of the compared characteristic of each block. It can be possible to reverse engineer the signature and then alter the image in such a manner to generate an identical signature and thus frustrate the authentication mechanism.

The following references discuss processing video signals, coding image blocks and authentication algorithms for digital images, the contents of which are incorporated herein by reference: WO 93/11502, US 4,254,400, US 5,351,095, US 5,520,290 and US 5,870,471.

5           Techniques for performing pair-wise block comparisons in a non-hierarchical technique are discussed in "Generating robust digital signature for image/video authentication", C.Y. Lin and S.F. Chang, in Proceedings of Multimedia and Security Workshop at A.C.M. Multimedia, September 1998. Inserting and/or hiding a signature in an image signal is discussed in "Secure spread spectrum water marking for images, audio and  
10 video," I. Cox, et al., in IEEE Int'l. Conf. on Image Processing, Vol. 3, pp. 243-246 (1996). The contents of these references are incorporated herein by reference.

Accordingly, it is desirable to provide an improved method and system for authenticating digital images which overcomes drawbacks of conventional methods and systems.

15

#### SUMMARY OF THE INVENTION

Generally speaking, in accordance with the invention, a method and system for creating authentication signatures for digital images is provided. The method and system involves partitioning the image into multiple blocks, comparing characteristics from each  
20 block and generating signature data bits based on the comparison. Each block can then be broken up into additional blocks and those blocks can be compared to create additional sets of signature bits which can be combined with the signature bits from the first set of blocks. Each or a portion of these new smaller blocks can be further broken up and the procedure can be repeated to provide an authentication signature of desired length by combining all or parts  
25 of the signature segments.

Accordingly, it is an object of the invention to provide an improved method and system for authenticating digital images and video.

Another object of the invention is to provide a method of creating an authentication signature for a digital image which is difficult to duplicate if the image is  
30 altered.

Another object of the invention is to provide an improved system for creating, storing and using authentication signatures for digital images which are difficult to duplicate if the original image is altered.

The invention accordingly comprises the several steps and relation of one or more of such steps with respect to each of the others and the product, system, signal and media adapted to effect or resulting from such steps, or as is exemplified in the following detailed description and drawings and the scope of the invention will be indicated in the  
5 claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a fuller understanding of the invention, reference is had to the following description, taken in connection with the accompanying drawings, in which:

10 FIG. 1 represents a digital image divided into sixteen blocks;  
FIG. 2A represents the partition of an image into four blocks at scale zero;  
FIG. 2B shows each of the blocks of FIG. 2A broken down into four sub-blocks at scale one;  
FIG. 3 is a flow chart of an authentication method in accordance with an  
15 embodiment of the invention;  
FIG. 4 is a flow chart of an authentication method in accordance with another embodiment of the invention; and  
FIG. 5 is a flow chart of an authentication method in accordance with an  
embodiment of the invention.

20

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Authentication algorithms for digital data should be difficult to reverse engineer and should insure that it is difficult, if not impossible to alter the image without changing the correspondence between the authentication signature and the image itself. The  
25 authentication is preferably performed in a content-based fashion and small, non-malicious changes in the image such as brightening or subjecting the image to various coding or compression algorithms, such as a lossy JPEG-like compression should be allowed. As used herein, the term image will also be used to refer to video frames.

Authentication methods and systems in accordance with the invention use a  
30 hierarchical technique, where the image is partitioned into blocks of a selected number of pixels at a first-level or scale (scale 0) and then each or a portion of the blocks are further partitioned into sub-blocks in successive scales. At each scale, the properties or characteristics of blocks (or sub-blocks) are compared to obtain a signature for that scale, and all or part of the signatures for each scale are combined. As the individual blocks are broken

down into successive scales of greater detail, the authentication signature generated at each scale can be added onto or otherwise combined with the signature generated from previous scale levels to provide a more robust signature which is more difficult to reverse engineer and evade, compared to conventional mono-scale techniques.

5 Referring to FIG. 2A, as a non-limiting illustration of a technique in accordance with preferred embodiments of the invention, the image (not shown) has been partitioned into four non-overlapping blocks at scale zero. These blocks are identified as A, B, C and D. The blocks together completely cover the entire image. It is also possible, in accordance with preferred embodiments of the invention, to use overlapping blocks or blocks  
10 which cover only a portion of the image, such as when authentication is only desired for a particular section of an image. Partitioning only a portion of the image can simplify the procedure if characteristic information will only be located at a certain location of the image.

A characteristic value is extracted from each block. This characteristic can be a luminance or chrominance characteristics, and the value can be the average luminance of  
15 the R (red) value (for example) over the entire block. Other values for the characteristics, such as the standard deviation of the characteristic of the block or some other characteristic value such as DCT coefficient and the like can be used. The computed characteristic values can be identified as  $f(A)$ ,  $f(B)$ ,  $f(C)$  and  $f(D)$  where  $f$  is the function used to compute the desired characteristic value.

20 The computed characteristic values of the four blocks can then be compared as follows. The  $f()$  values can be arranged in an ascending, descending or other predefined order. Because there are four blocks, there are twenty-four possible combinations of the ordering. (e.g., ABCD, ABDC, ADBC...). A five-bit binary number can be used to represent each combination in the ordering, i.e., ABCD could be assigned 00001 and CBDA might be  
25 assigned 10010. A five-bit binary number can represent 32 different combinations. The remaining eight combinations can be used for the instances where the values of some of the  $f()$  characteristics are equal. For example, if the four values are all equal, e.g., if the average green level of each block is identical, then a particular 5-bit number such as 11111 can be used to specify that particular combination. Thus, a 5-bit number is obtained at scale  
30 0 (level 1) to form a part of the authentication signature.

Although four blocks are shown in this embodiment of the invention, different numbers of blocks and sub-blocks can be used in alternate embodiments of the invention. Also, the number of sub-blocks, to which a block (or sub-block) is divided need not be identical to the number of blocks or sub-blocks of a higher scale. If the number of blocks is

greater than four, then the number of bits used to represent all of the combination will be greater than five.

Referring to FIG. 2B, each of the four blocks from scale 0 (FIG. 2A) are partitioned into four non-overlapping sub-blocks designated AA, AB and so forth. (As noted above, each of the blocks of FIG. 2A could have been divided into two sub-blocks, nine sub-blocks and so forth.) The partitioning of the image as shown in FIG. 2B represents scale 1 in the hierarchical decomposition. The characteristic values of each of blocks AA, AB, AC and AD are computed as discussed above and a 5-bit binary number is obtained for the four groups of sub-blocks of the scale 0 blocks. In alternate embodiments of the invention, different characteristics from those used at scale 0 can be used in each of the additional scales.

After the characteristic values of sub-blocks AA, AB, AC and AD are computed, a 5-bit binary number is obtained. The same process is repeated for the three other sets of sub-blocks at scale 1, resulting in four 5-bit numbers or 20 bits. These 20 bits are combined with the first 5-bit number and the process can be repeated successively for additional sets of sub-blocks at higher scales. The bits obtained from successive scales are concatenated to obtain a signature. For example, if four scales are used, then 5-bits are obtained from scale 0, 20-bits from scale 1, 80-bits from scale 2, and 320-bits from scale 3. All of these bits are concatenated to form a 425-bit level 4 authentication signature.

In alternate embodiments of the invention, the authentication signature can be obtained for a first color band and then similar signatures can be obtained for the additional color bands. The number of scales used would depend on the size of the image and the desired length of the signature.

The signature can be stored separately or sent with the image signal and transmitted with the signal or stored on a floppy disk, CD, DVD, video tape and the like.

A flow chart 500 corresponding to an authentication method in accordance with preferred embodiments of the invention is shown generally in FIG. 5. In step 510, image data 501 is divided into blocks. In step 520, values corresponding to characteristics of each block are calculated. In step 530, the blocks are ordered based on the values and in step 540, a first-level binary code corresponding to the order of the blocks is assigned. In step 550, each block from the first-level (scale 0) is subdivided into sub-blocks. In step 560, values for each sub-block are calculated and in step 570, the sub-blocks are ordered based on these values. In step 580, sets of binary codes corresponding to the ordered sets of sub-blocks are generated and in step 590, the binary code is combined with the first-level binary



code. In step 600, the process can be repeated and additional levels (scales) of authentication signature binary code can be developed.

Non-limiting uses of the signature obtained in accordance with preferred embodiments of the invention are illustrated in FIGS. 3 and 4.

5 Referring to FIG. 3, a data processor can be used to extract the authentication signature from image data using hierarchical algorithms discussed above in step 310. In step 320 the signature of the image or video frame can be inserted into or added to the signal representing the image. In step 330 the image together with the inserted signature can be transmitted to an image receiver.

10 In step 340, the authentication signature can be extracted from the image data using the hierarchical algorithm. In step 350, the inserted (hidden) signature from the image is extracted.

In step 360, the signature generated from the transmitted signal is compared to the signature inserted with the image. If they match, authentication is acknowledged in step 370. If they do not match, authentication failure is indicated in step 380.

15 Referring to FIG. 4, a method of authentication is illustrated where the signature is not inserted into the image signal. In step 410 the authentication signature of an image or video frame is extracted using a hierarchical algorithm in accordance with the invention. In step 420, this signature is stored at a secure location. When verification is  
20 desired, in step 430, the authentication signature is extracted from the image or video frame using the hierarchical algorithm. In step 440, the signature is compared to that stored during step 420 and if they match, authentication is acknowledged in step 450. Otherwise, authentication failure is noted in step 460.

## CLAIMS:

1. A method of creating an authentication signature corresponding to an image (100), comprising:
  - partitioning at least a portion of an image (100) into a selected number of first-level blocks of image information (510);
  - 5 determining a first-level block value corresponding to a characteristic of the portion of the image contained in each first-level block (520);
  - processing the first-level block values for the first-level blocks (530) and generating a first-level signature segment based on the first-level block values as a result of such processing (540);
  - 10 subdividing each first-level block into a selected number of second-level sub-blocks (550);
  - determining a second-level sub-block value corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560);
  - processing the second-level block values for the second-level sub-blocks (570)
  - 15 and generating a second-level signature segment based on the second-level block values as a result of such processing (580); and
  - combining at least a portion of the second-level signature segment with at least a portion of the first-level signature segment (590).
- 20 2. The method of claim 1, wherein the characteristic of the image is based on chrominance or luminance values for the blocks or sub-blocks.
3. The method of claim 1, wherein the first-level signature segment is generated by ordering the blocks based on the first-level block value for each block and generating a  
25 binary code corresponding to the order of the blocks.
4. The method of claim 3, wherein the second-level signature segment is generated by ordering the sub-blocks based on the second-level value for each sub-block and generating binary codes corresponding to the ordered sub-blocks and the binary codes

corresponding to the second-level signature segment are combined with the binary code corresponding to the first-level signature segment (590).

5. The method of claim 4, wherein the order of the four first-level blocks (A, B, C, D) are assigned a binary code.

6. The method of claim 5, wherein the second-level signature is generated by ordering the sub-blocks (AA, AB, AC, AD) based on the second-level sub-block values and assigning binary codes to groups of four sub-blocks (AA, AB, AC, AD).

10

7. The method of claim 6, wherein the blocks are ordered in ascending or descending order of the first-level block values and second-level block values.

8. The method of claim 7, wherein selected binary codes for the signature segment are assigned when the first-level block values or second-level block values of two or more blocks or sub-blocks are equal.

9. The method of claim 1, wherein at least a portion of the second-level sub-blocks are subdivided into a selected number of third-level sub-blocks, third level signature segments are generated from the third-level sub-blocks and the third-level signature segments are combined with the first and second-level signature segments (600).

10. A method of creating an authentication signature corresponding to an image (100), comprising:

25 partitioning at least a portion of an image into a selected number of first-level blocks of image information (510);

determining a first-level block value corresponding to a characteristic of the portion of the image contained in each first-level block (520);

ordering the blocks based on the first-level block values for the first-level

30 blocks (530) and generating a first-level signature segment corresponding to the resulting order (540);

subdividing each first-level block into a selected number of second-level sub-blocks (550);

determining a second-level sub-block value corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560);

ordering the sub-blocks based on the second-level block values (570) and generating a second-level signature segment corresponding to the order of the sub-blocks

5 (580); and

combining the second-level signature segment with the first-level signature segment (590).

11. A system for providing an authentication signature corresponding to a digital  
10 image, comprising:

a data processor constructed to receive data representing an image (501); partition at least a portion of the image into a selected number of first-level blocks of image information (510); determine first-level block values corresponding to a characteristic of the portion of the image contained in each first-level blocks (520); process the first-level block  
15 values for the first-level blocks (530); generate a first-level signature segment as a result of such processing (540); subdivide each first-level block into a selected number of second-level sub-blocks (550); determine a second-level sub-block value corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560); and process the second-level block values for the second-level sub-blocks (570) and generate a second-level  
20 signature segment as a result of such processing (580).

12. The system of claim 11, wherein the data processor is constructed to determine the first level block value based on chrominance or luminance values for the blocks or sub-blocks.

25

13. The system of claim 11, wherein the data processor is constructed to subdivide at least some of the second-level sub-blocks into a selected number of third-level sub-blocks and generate signature segments based on the third-level sub-blocks (600).

30 14. A system for creating an authentication signature corresponding to an image, comprising:

a data processor constructed to receive data representing an image (501); partition at least a portion of an image into a selected number of first-level blocks of image information (510); determine a first-level block value corresponding to a characteristic of the

portion of the image contained in each first-level block (520); order the blocks based on the first-level block values for the first-level blocks (530); generate a first-level signature segment corresponding to the resulting order (540); subdivide each first-level block into a selected number of second-level sub-blocks (550); determine a second-level sub-block value  
5 corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560); order the sub-blocks based on the second-level block values (570); generate a second-level signature segment corresponding to the order of the sub-blocks (580); and combine the second-level signature segment with the first-level signature segment (590).

10 15. A data storage medium containing data representing an image and a signature corresponding to the image generated by the steps comprized partitioning at least a portion of an image into a selected number of first-level blocks of image information (510); determining a first-level block value corresponding to a characteristic of the portion of the image contained in each first-level block (520); processing the first-level block values for the first-  
15 level blocks (530) and generating a first-level signature segment based on the first-level block values as a result of such processing (540); subdividing each first-level block into a selected number of second-level sub-blocks (550); determining a second-level sub-block value corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560); processing the second-level block values for the second-level sub-  
20 blocks (570); and generating a second-level signature segment based on the second-level block values as a result of such processing (580).

16. An image authentication system, comprising:  
providing a first image (100);  
25 generating an authentication signature (410) by a first method comprising partitioning at least a portion of an image into a selected number of first-level blocks of image information (510); determining a first-level block value corresponding processing the first-level block values for the first-level blocks (530) and generating a first-level signature segment based on the first-level block values as a result of such processing (540);  
30 subdividing each first-level block into a selected number of second-level sub-blocks (550); determining a second-level sub-block value corresponding to a characteristic of the portion of the image contained in each second-level sub-block (560); processing the second-level block values for the second-level sub-blocks (570) and generating a second-level signature segment

based on the second-level block values (580) as a result of such processing; and combining the second-level signature segment with the first-level signature segment (590);

providing a second image which may be identical to the first image;

generating a second signature for the second image by the first method (430);

5 and

comparing the first signature to the second signature (440).

17. A method of creating an authentication signature for an image, comprising:

dividing an image into a first level portion or portions (510) and generating a

10 signature segment based on that portion or portions of the image (540); and

subdividing the first level portion or portions of the image into second level sub-portions (500) and generating signature segments based on the subdivisions (580).

18. The method of claim 17, including further subdividing portions of the image

15 and generating additional signature segments based on said further subdivisions (600).

1/5

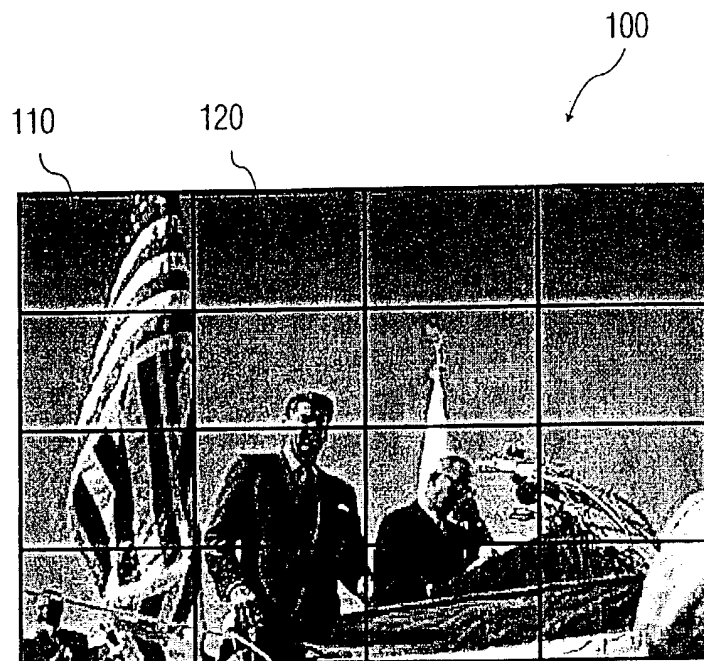


FIG. 1

2/5

A	B
C	D

FIG. 2A

AA	AB	BA	BB
AC	AD	BC	BD
CA	CB	DA	DB
CC	CD	DC	DD

FIG. 2B



3/5

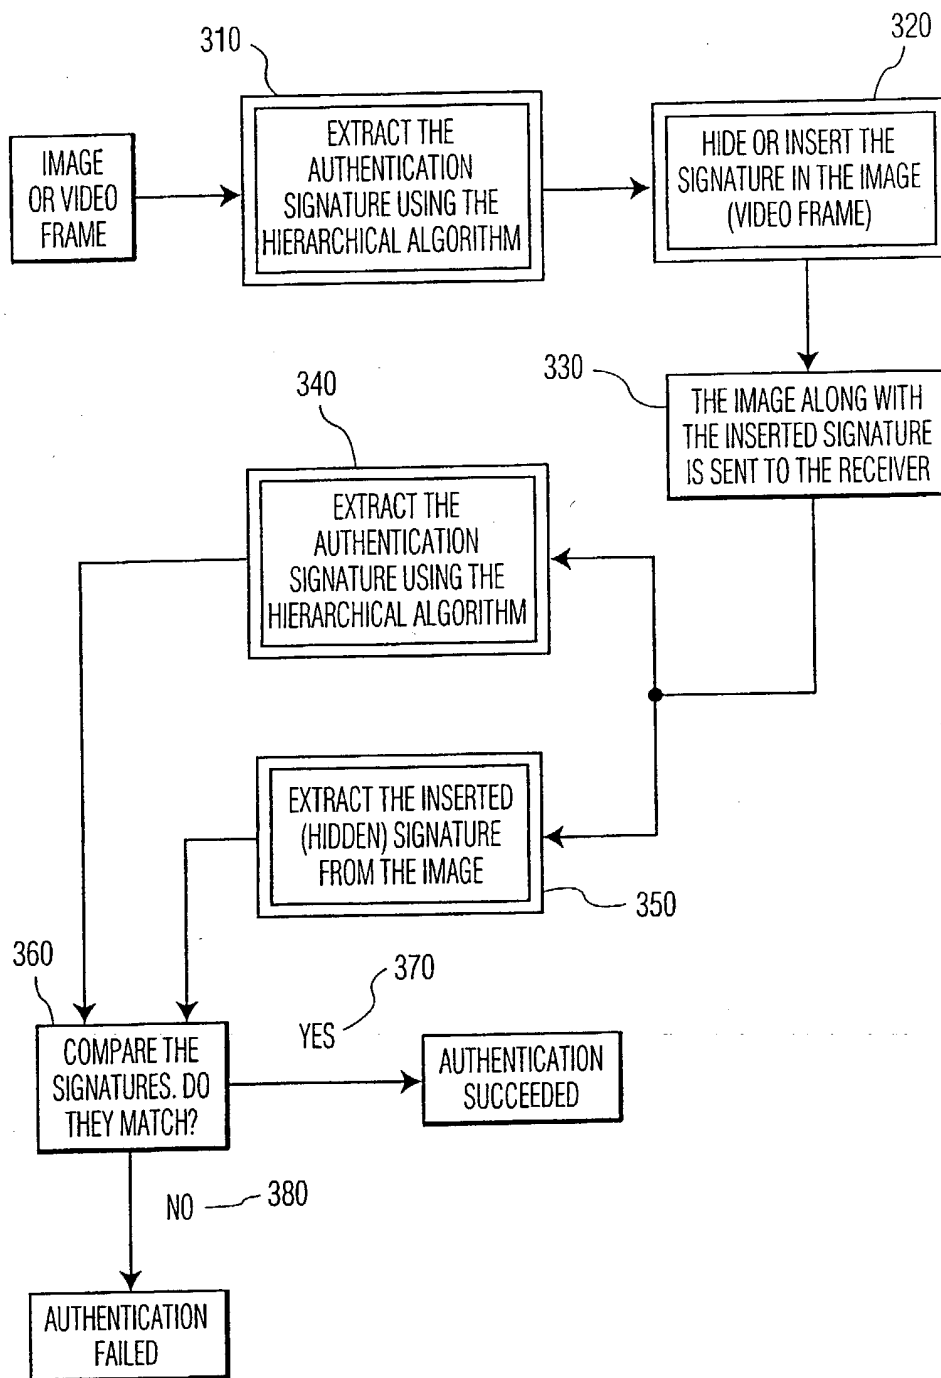


FIG. 3

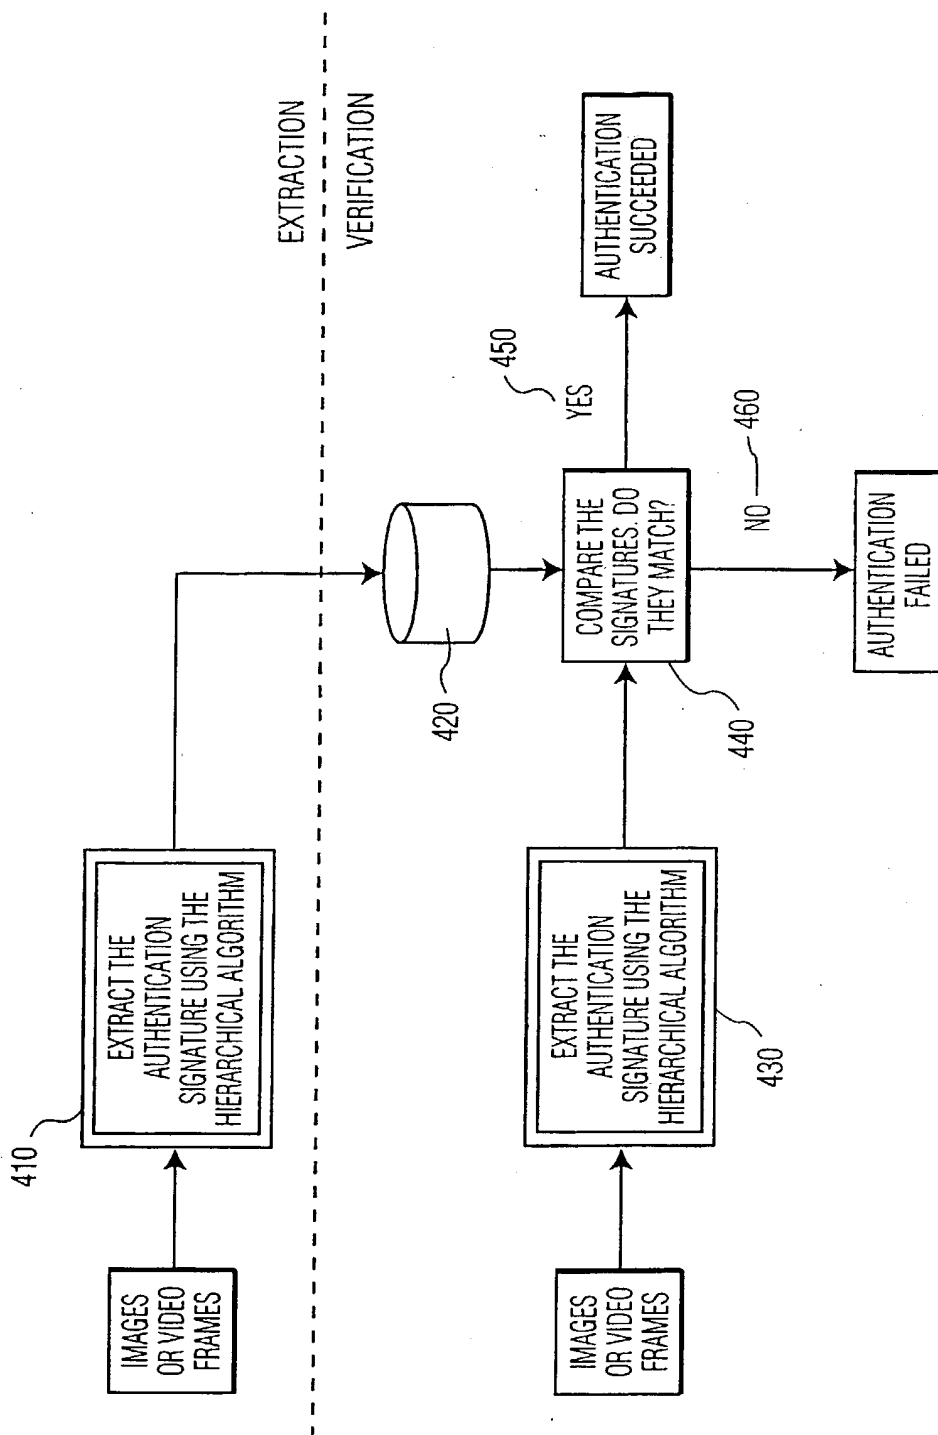


FIG. 4

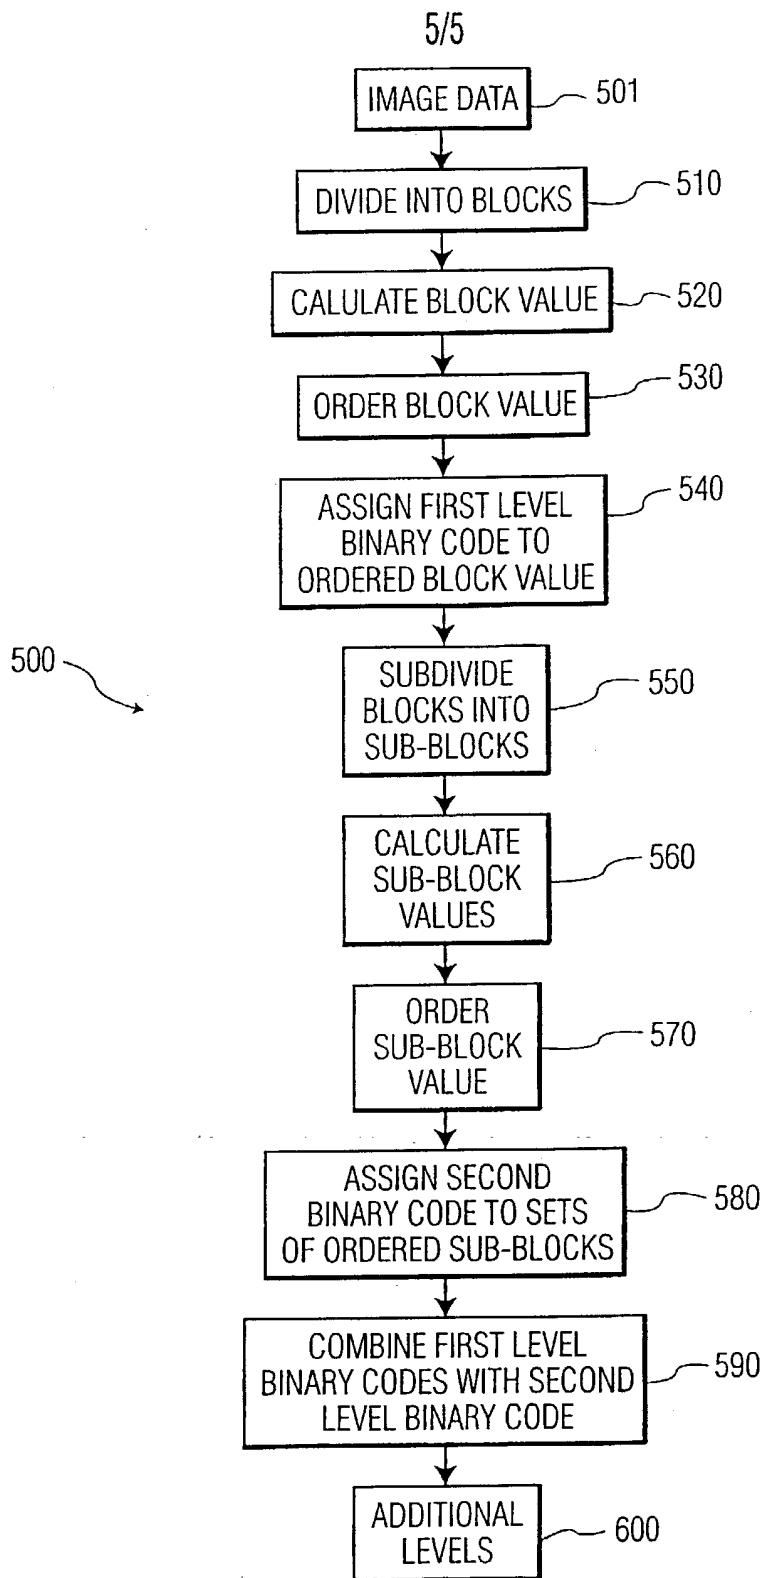


FIG. 5

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number  
**WO 01/72030 A3**

- (51) International Patent Classification<sup>7</sup>: H04N 1/32, 7/26 (74) Agent: SCHMITZ, Herman, J., R.: Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP01/02915
- (22) International Filing Date: 15 March 2001 (15.03.2001) (81) Designated States (national): CN, JP, KR.
- (25) Filing Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/531,700 20 March 2000 (20.03.2000) US Published: — with international search report
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (88) Date of publication of the international search report: 28 February 2002
- (72) Inventor: KRISHNAMACHARI, Santhana; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HIERARCHICAL AUTHENTICATION SYSTEM FOR IMAGES AND VIDEO

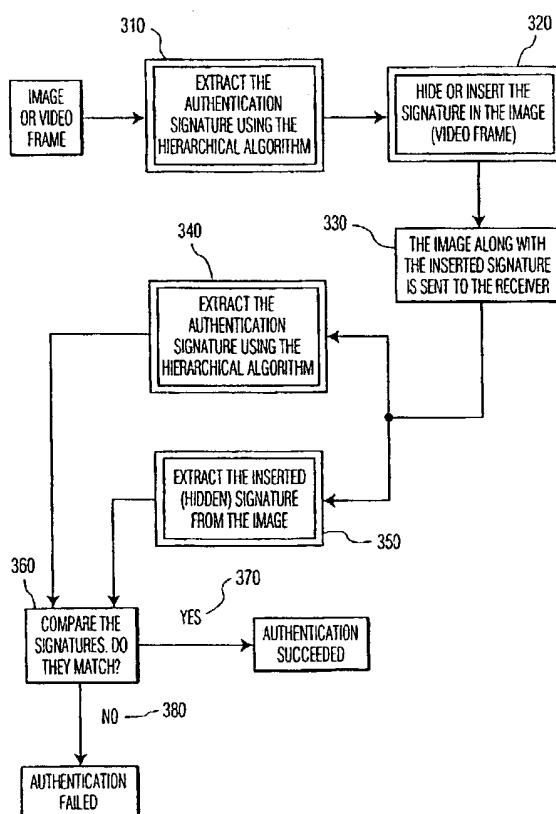

(57) Abstract: A method and system for creating authentication signatures for digital images and video frames is provided. The method and system involves partitioning the image into multiple blocks, comparing characteristics from each block and generating data bits based on the comparison. Each block is then broken up into additional blocks and those blocks are compared to create additional signature bits which are combined with the signature sets from the first set of blocks. Each of these new smaller blocks can be further broken up and the procedure can be repeated to provide an authentication signature of desired length.

WO 01/72030 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02915

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04N1/32 H04N7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 967 803 A (NIPPON ELECTRIC CO) 29 December 1999 (1999-12-29) abstract figure 1	1-18
A	WO 93 11502 A (THOMSON CONSUMER ELECTRONICS) 10 June 1993 (1993-06-10) cited in the application abstract figure 4	1-18
A	US 5 930 369 A (COX INGEMAR J ET AL) 27 July 1999 (1999-07-27) abstract	1-18
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

21 November 2001

Date of mailing of the international search report

03/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Stoffers, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02915

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	C. Y. LIN AND S. F. CHANG: "Generating Robust Digital Signature for Image/Video Authentication" MULTIMEDIA AND SECURITY WORKSHOP AT ACM MULTIMEDIA '98, September 1998 (1998-09), XP002183632 cited in the application figure 1 ---	1-18
A	EP 0 953 938 A (HEWLETT PACKARD CO) 3 November 1999 (1999-11-03) abstract; figure 9B -----	1-18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/02915

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0967803	A	29-12-1999	US 6154571 A CN 1238439 A EP 0967803 A2 JP 2000138818 A US 6278792 B1	28-11-2000 15-12-1999 29-12-1999 16-05-2000 21-08-2001
WO 9311502	A	10-06-1993	FR 2684258 A1 AT 194037 T DE 69231187 D1 DE 69231187 T2 EP 0568694 A1 WO 9311502 A1 JP 6504897 T US 6097832 A	28-05-1993 15-07-2000 27-07-2000 15-02-2001 10-11-1993 10-06-1993 02-06-1994 01-08-2000
US 5930369	A	27-07-1999	US 6208735 B1 AU 701639 B2 AU 6584096 A CA 2184949 A1 EP 0766468 A2 JP 9191394 A	27-03-2001 04-02-1999 10-04-1997 29-03-1997 02-04-1997 22-07-1997
EP 0953938	A	03-11-1999	EP 0953938 A2 JP 11355558 A	03-11-1999 24-12-1999

**THIS PAGE BLANK (USPTO)**